



Foodservice Equipment

Job _____ Item# _____

Step-up Open Top Range

Models: TMSO 624 • TMSO 416 • TMSO 208

Toastmaster Step-up Open Top is the most economical and flexible in the food service industry. It offers unsurpassed performance, combining proven control system with Toastmaster quality and durability.

Features:

- Front, back and sides including top rail are all stainless steel.
- Easy to use rotating knobs to control the gas and heat.
- Each burner is controlled by an independent control valve.
- One standing pilot services each burner. A 3/4" rear gas connection is standard.
- Elevated rear with cast iron top grates and open burners.
- Aluminized drip tray.
- Rest on 4" adjustable legs




All units are shipped with LP configuration. A universal pressure regulator are shipped loose with the unit including Natural Gas orifice for field conversation.

Toastmaster® 5600 13th Street, Menominee, MI 49858 • www.toastmastercorp.com
Toll Free: 1-800-338-9886 • Telephone: 1-906-863-4401 • Fax: 1-906-863-5889

Step-up Open Top Range - Models: TMSO 624, TMSO 416 & TMSO 208

Step-Up Open Top Range

Step-up Open Top Range - Models: TMSO 624, TMSO 416 & TMSO 208

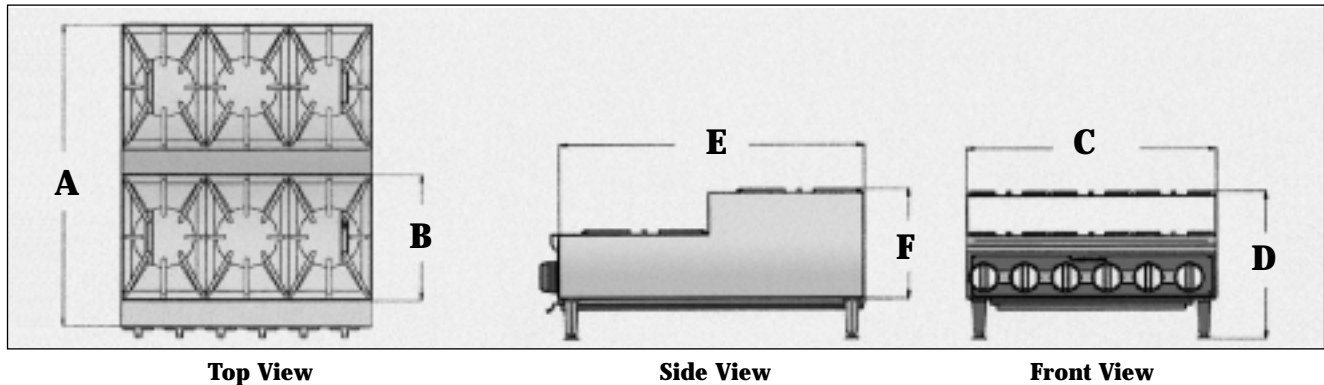

Model Number	DIMENSIONS Units inches - see drawing					
	A	B	C	D	E	F
TMSO 624	29.76"	12.24"	24"	14.45"	29"	10.51"
TMSO 416	29.76"	12.24"	16"	14.45"	29"	10.51"
TMSO 208	29.76"	12.24"	8"	14.45"	29"	10.51"

Model Number	Number of Burners	BTU RATING	
		LP	N
TMSO 624	6	120,000	120,000
TMSO 416	4	80,000	80,000
TMSO 208	2	40,000	40,000

- **All Models:** Require operating pressure are 3.5-5" for natural gas and 11.-14" for propane. 3/4" NPT rear gas with pressure regulator is standard.
- **Flex Hose:** Use only a commercial flex hose. The I.D. should not be smaller than the I.D. of the pipe from the pipe to which it is connected.

**Intended for commercial use only.
Not intended for household use.
Check local codes for fire and sanitary regulations.**

Gas Heat Control System:
Each burner is controlled by independent control valve. One standing pilot services each burner. A 3/4" rear connection is standard.

BTU Rating: Refer to the Gas Rating

Installation Requirements:
Recommended to install under vented hood.

TMSO:
Each burner rated 20,000 BTU per hour for natural gas and 20,000 for propane gas.

INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.



Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.

