



Foodservice Equipment

Job _____ Item# _____

XO-1STM Tabletop Steam Oven Tabletop Oven



SIZE:

XO-1STM - 20" High, 27-1/8" Wide, 28-1/8" Deep
508 mm High, 689 mm Wide, 714 mm Deep

Toastmaster's XO-1STM offers the capability to steam, dry bake or bake with steam. Steam is generated internally by using the same elements that generate the heat. This eliminates the need for a boiler or reservoir. Maintenance is at a minimum since there is no need to de-lime as usually required in other steam units.

When producing product in the cook mode, simply set the controls to the desired temperature. If steam is desired, simply set the steam timer to the desired setting.

These countertop units are constructed of long life, heavy duty stainless steel. Our unique **Moving Air** system ensures that your product will be heated evenly, producing consistent quality results. These units feature solid state controls which are both durable and user friendly.

CONSTRUCTION:

- Welded stainless steel
- Fully insulated
- Control panel accessible through front of unit
- Heating elements accessible inside of cabinet and through side

CONTROLS:

- Solid state controls
- Indicator light for thermostat
- Two speed fan

XO-1STM Tabletop Steam Oven

STANDARD FEATURES:

- Stainless steel construction
- Magnetic door handle
- 4" legs
- Silicone rubber gasket
- Tempered glass door
- Solid state controls
- Internally generated steam
- 2 speed fan

OPTIONS:


- Wire Shelf Racks each (98-0125-B)
- Cart with Panslides (98-9890-PS)
- Cart without Panslides (98-9890-NP)
- Stand with Panslides (98-9970-PS)
- Stand without Panslides (98-9970-NP)
- Stacking Kit
- Solid Door

Note: Units cannot be stacked when using cart or stand.


LABORATORY CERTIFICATION AND APPROVAL



XO-1STM Tabletop Steam Oven

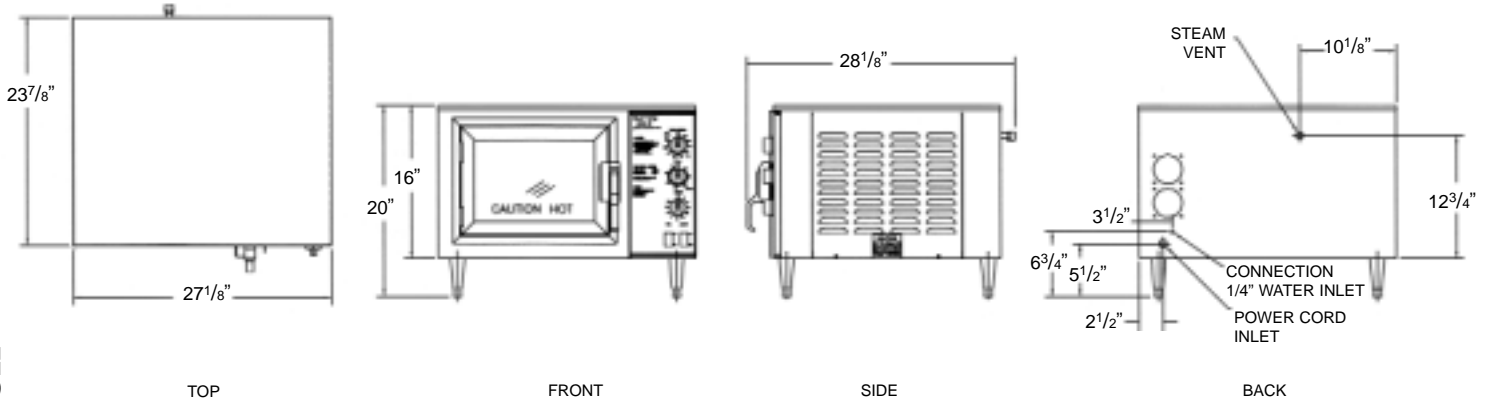

Toastmaster XO-1STM Tabletop Steam Oven



120 Volt, 20 Amp
(NEMA 5-20 P)

SPECIFICATIONS:

ELECTRICAL:

- 120/1 at 16.5 Amps.

SERVICE CONNECTIONS:

- Unit is shipped from factory with cord and plug.
- 120-Volt single phase is standard.

ELECTRICAL:

Amp Draw	208/1	208/3	240/1	240/3
L1	14.5	n/a	13	n/a

LISTINGS:

The XO-1STM has C-ETL-US & NSF listings.



INSTALLATION:

Allow four inches on each side and back of unit for ventilation of oven.

CAPACITY:

	13"x18" Sheet Pans	Spacing
Oven	3	3-3/4"
	4	2"

DIMENSIONS:

	Height	Width	Depth
Exterior	20"	27-1/8"	28-1/8"
Interior	11-3/4"	15-3/4"	21-1/2"

DOOR SWING: Oven - 17" (432 mm)

PACKING SIZE:

24" High, 36" Wide, 36" Deep
(610 mm High, 914 mm Wide, 914 mm Deep)

SHIPPING WEIGHT:

140 Pounds (64 Kg), FOB Menominee, MI 49858

INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.



Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.



Toastmaster® 5600 13th Street, Menominee, MI 49858 • www.toastmastercorp.com

Toll Free: 1-800-338-9886 • Telephone: 1-906-863-4401 • Fax: 1-906-863-5889