



## Mini Conveyor Toaster

*TC13A3674, TC13A3663, TC13A3666*

### Standard Features:

- Stainless steel exterior construction
- 10" wide conveyor belt
- Automatic cool-down feature
- Energy-saving standby mode
- Air-cooled case construction
- Convection air dries product faster
- Large, easy-to-operate dial controls
- Separate upper and lower heat settings and conveyor belt speed
- High volume (250 slices per hour)
- Factory installed NEMA cord and plug
- Single-piece stainless steel crumb tray
- Damage resistant calrod heating elements
- All models toast bread, buns and bagels



*For toasting a variety of breads, buns, rolls and bagels.*

### Application:

TC13 Mini Conveyor Toasters are designed to uniformly toast breads in large quantities, using continuous feed methods.

### General Information:

- Chamber opening 1-1/2" (38.1mm)
- Chamber size:
  - 12-3/4" Long (323.85mm) x
  - 10-1/4" Wide (260.35mm)
- Requires approx. 14-1/4" of counter space
- Can be stacked two high

### Product Loading:

- TC13 is equipped with a self-storing loading rack that is angled for feed the product into the toaster continuously.

### Safety:

Unique air flow design keeps case, top and sides cool. The unit is equipped with an auto cool down feature which allows the fan to cool the outer skin when the unit is turned off.

### Construction:

Steel construction with a stainless steel finish is used for durability. Includes a stainless steel slide out crumb tray for easy clean-up.

### Electrical:

Available in 120V, 208V or 240V, 1-phase only. Total rated input is 1.6KW (120V), 1.1KW (208V), or 1.5KW (240V). A factory installed 6 foot (1.8m) cord is included.

### Heating:

When control is set to "ON", quartz infrared elements will turn on to toast both sides of bread. Lightness and darkness of the product is achieved by adjusting conveyor belt speed. Standby positive allow for energy savings during non-peak periods.

### Controls:

Rotary 3-position dial selects ON/OFF/STANDBY positions. A conveyor speed dial controls the belt speed..

### Accessories:

- Fiberglass return tray.
- Angled loading rack. (Supplied with TC13D3)
- Horizontal loading rack (optional)
- Stainless steel tray (optional) fits models as an exit tray.

### Warranty:

Warranty includes one year parts and labor, on-site service. (USA only) Call factory for warranty authorization.


### Options:

Stacking bracket


**Mini Conveyor Toaster - Models: TC13A3674, TC13A3663 & TC13A3666**

# Mini Conveyor Toaster

**TC13A3674, TC13A3663, TC13A3666**

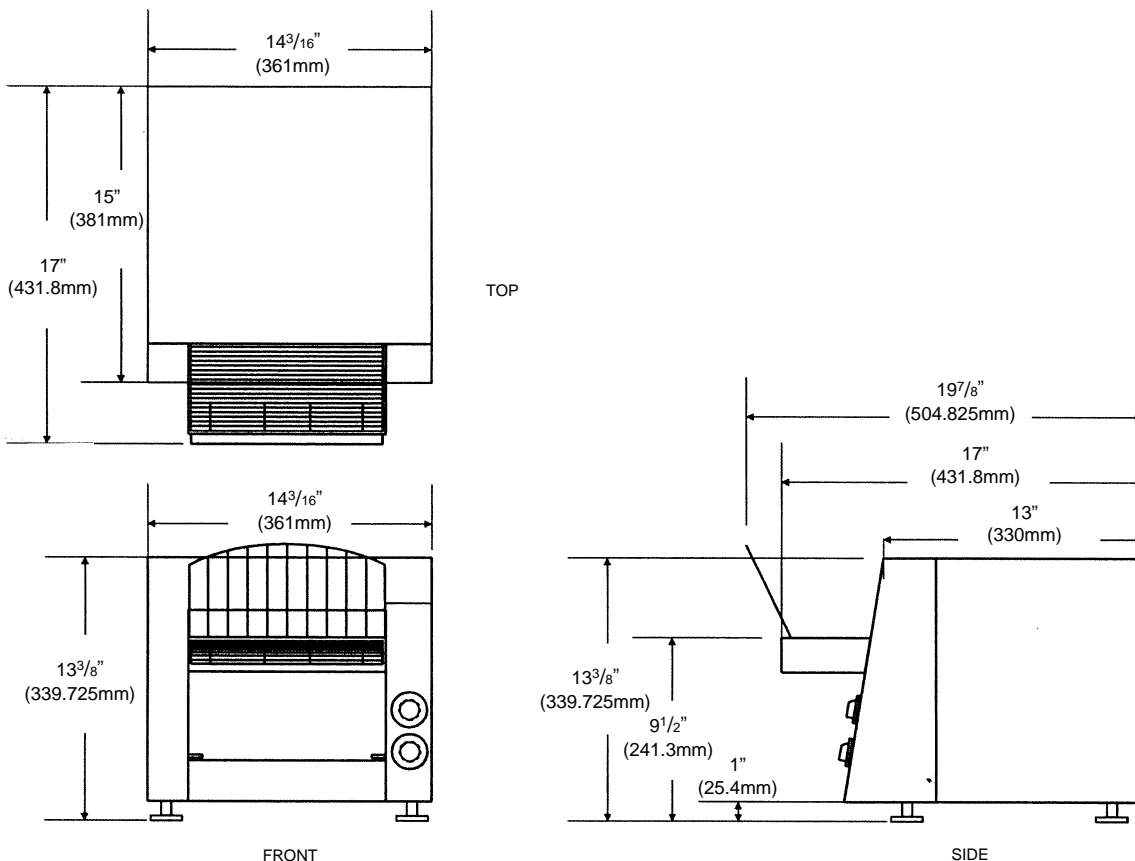

Model Number	TC13A3674	TC13A3663	TC13A3666
<b>Product Delivery</b>	Front return	Front return	Front return
<b>Width</b>	14-7/32"	14-7/32"	14-7/32"
<b>Depth (w/cord clearance)</b>	18-3/32"	18-3/32"	18-3/32"
<b>Height w/1" Legs</b>	13-3/8"	13-3/8"	13-3/8"
<b>Toasting Chamber Dimensions</b>	10-1/4" W x 1-1/2" H x 12-3/4" L	10-1/4" W x 1-1/2" H x 12-3/4" L	10-1/4" W x 1-1/2" H x 12-3/4" L
<b>Loading Height</b>	1-3/8"	1-3/8"	1-3/8"
<b>Capacity (slices per hour)</b>	250	250	250
<b>Supply (1 phase)</b>	120 V	208 V	240 V
<b>Current draw</b>	13.4 A	5.5 A	6.4 A
<b>Rated heat input</b>	1.6 KW	1.1 KW	1.5 KW
<b>Factory Installed Cord &amp; Plug</b>	NEMA 5-20P	NEMA 6-20P	NEMA 6-20P
<b>Shipping Weight</b>	57 lbs.	57 lbs.	57 lbs.

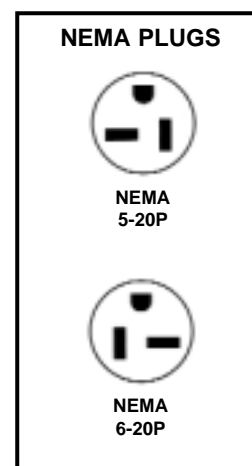

**INTENDED FOR COMMERCIAL USE ONLY. NOT FOR HOUSEHOLD USE.**



Toastmaster, in line with its policy to continually improve its product, reserves the right to change materials or specifications without notice. Such revisions do not entitle the buyer to corresponding changes, improvements, additions, or replacements for previously purchased equipment.

